




**New additions to the  
Schunk product range**

Long-fibre rigid felt boards

New additions to the Schunk product range

**Long-fibre rigid felt boards  
for insulation application**

# New additions to the Schunk product range

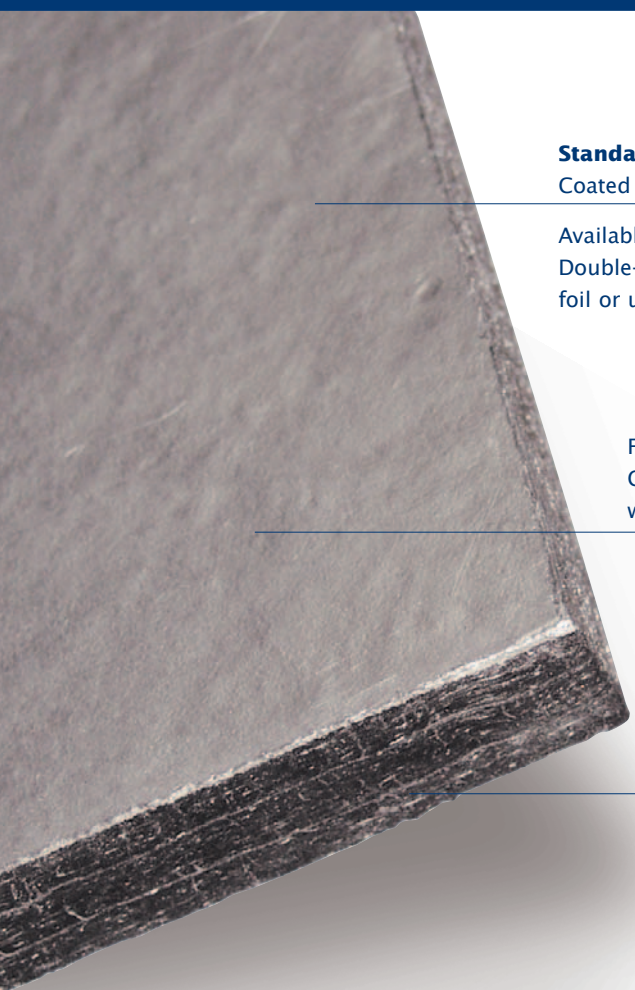

## Standard range from stock:

Coated on one side with **graphite foil**

Available upon request:  
Double-sided coating with graphite foil or uncoated

For special protection:  
Coated on one or both sides with **C/C foil**

Long-fibre rigid felt with **low particle release**

## Long-fibre rigid felt boards


In addition to our 24-hour delivery service for C/C components, we now also offer standard long-fibre rigid felt boards with low particle release.

Schunk material designation: FU 2914

We can also supply the long-fibre rigid felt boards in purified form upon request.

We look forward to your call – we're here to help.


Manfred Meyer  
Phone: +49 (0) 641 608-1518  
Fax: +49 (0) 641 608-1673  
manfred.meyer@schunk-group.com  
www.schunk-group.com



Standard dimensions:  
1,500 mm x 1,000 mm  
(Thickness: 40, 30, 20 mm)

### FU 2914 material properties

Density (g/cm <sup>3</sup> )	0,22
Thermal conductivity (W/(m·K) in vacuum	
at 20 °C	0,2
at 1000 °C	0,3
at 2000 °C	0,6
Ash residue, unpurified, ppm	< 500

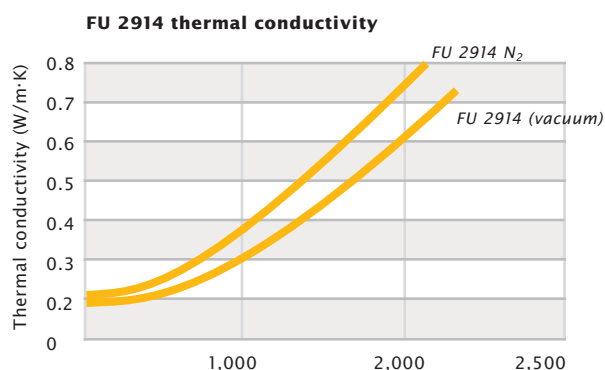

20.37e/1000/2005

## Schunk Kohlenstofftechnik GmbH

Rodheimer Strasse 59  
35452 Heuchelheim

Phone: +49 (641) 608-0  
Fax: +49 (641) 608-1673

www.schunk-group.com

**Schunk Kohlenstofftechnik**

